



KG28 MULTI DRIVER LED CC

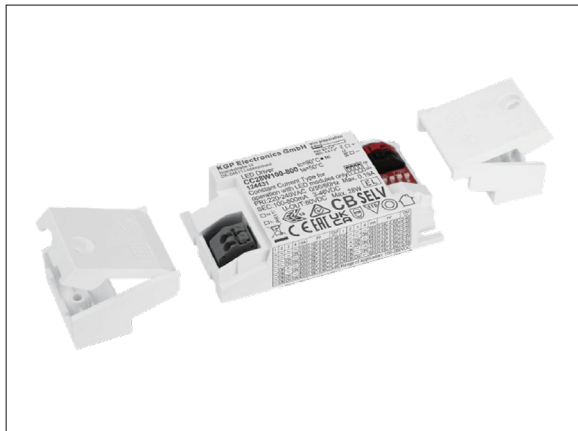

SERIE KGP | B95-KG28 MULTI


Ausgang: CC (Konstant-Strom) 100 - 800 mA
Uscita: CC (corrente costante) 100 - 800 mA

LED Netzteil On / Off
LED Alimentatore On / Off

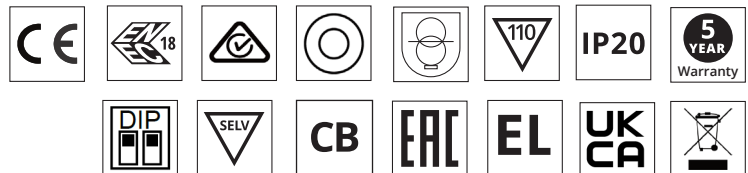

EIGENSCHAFTEN | CARATTERISTICHE

Art. Nr.	W	V in	Amp.	V out	Amp. out	IP	ta	Dimensions	VP
B95-KG28M180C	28 W	220 - 240 VAc	/	3 - 46 Vdc	100 - 800 mA	IP 20	-10 ... +50°C	110 x 40 x 21 mm	144

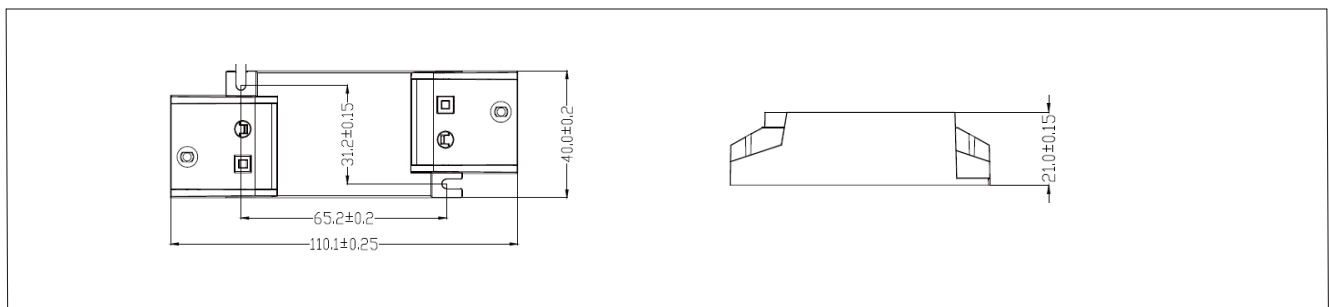

Amp. out	Amp. in	W in	W out	PF	Eff.	V out	V no load
100mA	0.08A	5.4W	0.30-4.60W	0.16-0.57	83%	3-46V	60V Max.
150mA	0.09A	7.9W	0.45-6.90W	0.19-0.67	86%		
200mA	0.10A	10.4W	0.60-9.20W	0.24-0.75	87%		
250mA	0.11A	13.0W	0.75-11.50W	0.26-0.80	87%		
300mA	0.12A	15.5W	0.90-13.80W	0.29-0.84	88%		
350mA	0.13A	18.0W	1.05-16.10W	0.32-0.86	88%		
400mA	0.14A	20.4W	1.20-18.40W	0.34-0.89	89%		
450mA	0.15A	23.0W	1.35-20.70W	0.36-0.90	89%		
500mA	0.16A	25.8W	1.50-23.00W	0.38-0.92	88%		
550mA	0.17A	28.4W	1.65-25.30W	0.39-0.93	88%		
600mA	0.18A	31.0W	1.80-27.60W	0.40-0.94	88%		
650mA	0.19A	31.4W	1.95-27.95W	0.42-0.94	88%	3-43V	
700mA	0.19A	31.8W	2.10-28.00W	0.43-0.94	87%	3-40V	
750mA	0.19A	31.5W	2.25-27.75W	0.46-0.94	87%	3-37V	
800mA	0.19A	31.8W	2.40-28.00W	0.48-0.94	87%	3-35V	

