

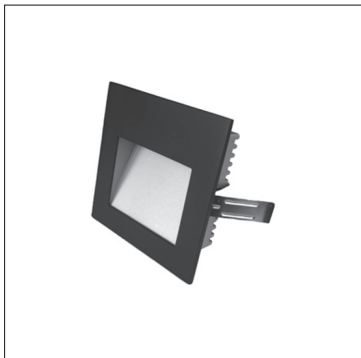





SERIE B502-Q90

FIX - FISSO

**OHNE NETZTEIL
SENZA ALIMENTATORE**



EIGENSCHAFTEN | CARATTERISTICHE







Farbe Colore	Art. Nr.	W	CREE LED	LM	K	CRI RA	Optik	
	B502-Q9003	2,1 W	700mA / 9 V	128 lm	3000 K	> 90	110°	77 x 77 mm
	B502-Q9005	2,1 W	700mA / 9 V	128 lm	3000 K	> 90	110°	77 x 77 mm
	B502-Q920Z	(Einputzdose - Scatola da incasso)						78 x 115 x 60 mm

PASSENDES NETZTEIL | ALIMENTATORE ADATTO

Art. Nr.	W	V in	Amp.	V out	Amp. out	IP	ta	Dimensions	VP
B95-KG7M170C	7 W	220 - 240 VAc	/	2.5 - 20 VDC	100 - 700 mA	IP 20	-10 ... +50°C	65 x 29 x 18 mm	325
B96-AL20MCH	8 - 20 W	220 - 240 VAc	/	3 - 42 VDC	200 - 700 mA	IP 20	-10 ... +50°C	125 x 38 x 23 mm	25

andere Leistungen/Dali > siehe Netzteile | altre potenze/Dali > vedi alimentatori

MONTAGEANLEITUNG | ISTRUZIONI MONTAGGIO



LICHTVERTEILUNG | DISTRIBUZIONE DELLA LUCE

