


SERIE	B500 B5108
POWER	10,8 W
LUMEN	1440 lm
CREE COB	350 mA - 37 V
CRI / RA	> 90




Lebensdauer | vita: L80 B10 50.000h

Der LED Einsatz eignet sich für alle Ringe und Rahmen der Serie B5 ...
Il modulo LED è adatto a tutti gli anelli e le cornici della serie B5 ...

OHNE NETZTEIL | SENZA ALIMENTATORE



Art. Nr.	W	Lm	K	Driver
B5108-27 30 35	10,8 W	1440	2700 K	/
B5108-30 30 35	10,8 W	1440	3000 K	/
B5108-40 30 35	10,8 W	1440	4000 K	/



Art. Nr.	W	Lm	K	Driver
B5108-27 50 35	10,8 W	1440	2700 K	/
B5108-30 50 35	10,8 W	1440	3000 K	/
B5108-40 50 35	10,8 W	1440	4000 K	/




TRIAC DIM NETZTEIL | ALIMENTATORE TRIAC DIM

Art. Nr.	W	V in	Amp.	V out	Amp. out	IP	ta	Dimensions	VP
B96-PE294B4233	12,80 W	200 - 240 VAc	/	25 - 37 VDC	330 mA	IP 20	-20 ... +60°C	115 x 40 x 26 mm	/

andere Dali/KNX Driver | altri Dali/KNX driver:

> Siehe www.brilux.it/driver-dimmer | visita www.brilux.it/driver-dimmer

LICHTVERTEILUNG | DISTRIBUZIONE DELLA LUCE

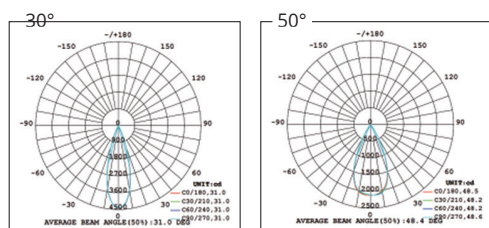

DIMMER

Schalk	Universal Tastdimmer Regolatore a tasti universale	ETD U2 ETD 2E
Eltako	Universal-Dimmschalter Dimmer universale elettronico	EUD61NPN-UC EUD12NPN-UC