




SERIE	B500 B563
POWER	6,3 W
LUMEN	840 lm
CREE COB	700 mA - 9 V
CRI / RA	> 90




Lebensdauer | vita: L80 B10 50.000h




Der LED Einsatz eignet sich für alle Ringe und Rahmen der Serie B5 ...
Il modulo LED è adatto a tutti gli anelli e le cornici della serie B5 ...

OHNE NETZTEIL | SENZA ALIMENTATORE



Art. Nr.	W	Lm	K	Driver
B563-27 30 70	6,3 W	840	2700 K	/
B563-30 30 70	6,3 W	840	3000 K	/
B563-40 30 70	6,3 W	840	4000 K	/



Art. Nr.	W	Lm	K	Driver
B563-27 50 70	6,3 W	840	2700 K	/
B563-30 50 70	6,3 W	840	3000 K	/
B563-40 50 70	6,3 W	840	4000 K	/




TRIAC DIM NETZTEIL | ALIMENTATORE TRIAC DIM

Art. Nr.	W	V in	Amp.	V out	Amp. out	IP	ta	Dimensions	VP
B96-PE294B1270	10,5 W	200 - 240 VAc	/	6 - 15 VDC	700 mA	IP 20	-20 ... +60°C	115 x 40 x 26 mm	/

andere Dali/KNX Driver | altri Dali/KNX driver:

> Siehe www.brilux.it/driver-dimmer | visita www.brilux.it/driver-dimmer

LICHTVERTEILUNG | DISTRIBUZIONE DELLA LUCE

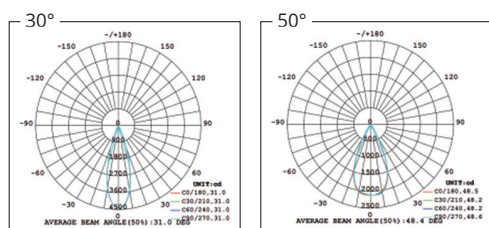

DIMMER

Schalk	Universal Tastdimmer Regolatore a tasti universale	ETD U2
		ETD 2E
Eltako	Universal-Dimmschalter Dimmer universale elettronico	EUD61NPN-UC
		EUD12NPN-UC