




SERIE	B500 / TUNABLE WHITE B566
POWER	5 W
LUMEN	600 lm
CREE COB	2 x 350 mA - 18 V
CRI / RA	> 90
LEITER / FILI	2 + 2



Lebensdauer | vita: L80 B10 50.000h




Der LED Einsatz eignet sich für alle Ringe und Rahmen der Serie B5 ...
Il modulo LED è adatto a tutti gli anelli e cornici della serie B5 ...

Montageanleitung | Istruzioni montaggio


Download  [Homepage](#)

OHNE NETZTEIL | SENZA ALIMENTATORE



Art. Nr.	W	Lm	K	Driver
B566-T27 < > 576035	5 W	600	2700 - 5700 K	/

TUNABLE WHITE LIGHT

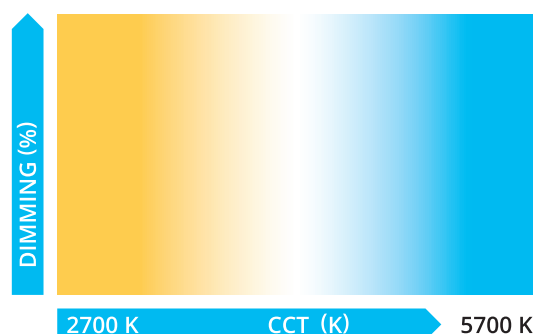

OPTIONAL | OPZIONALE



☐ **B566-RR15**
Reflektor | Riflettore 15°



☐ **B566-RR25**
Reflektor | Riflettore 25°



☒ **B566-RR6004**
Reflektor gold | Riflettore oro 60°