

CTL3K RGB LED CONTROLLER TOUCH CV

LED LIGHTING



SERIE CONTROLLER | B60-CTL-3K

Ausgang: CV (Konstant-Spannung)

Uscita: CV (tensione costante)

Touch Controller RGB CV

Für Kaiser-Dose

Per scatola incasso Kaiser




EIGENSCHAFTEN | CARATTERISTICHE

Art. Nr.	W	V in	Amp.	V out	Amp. out	IP	ta	Dimensions	VP
B60-CTL3K-CVB	144 - 288 W	12 - 24 VDC	/	12 - 24 VDC	3 x 4 A	IP 20	-20°C ... +60°C	80 x 80 x 41,8 mm	/

Safety & Warnings

- DO NOT install with power applied to device.
- DO NOT expose the device to moisture.

Wiring diagram

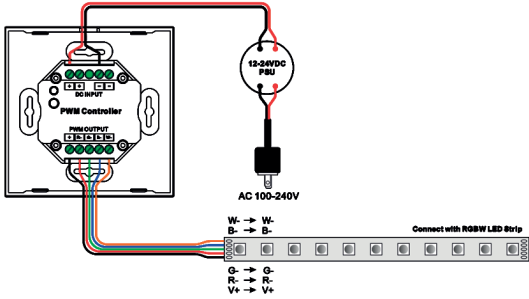

Installation

