

BODENSTRAHLER SYM | INCASSO A PAVIMENTO SYM

LED LIGHTING







SERIE B80-OG/OGB - 24 V DIM

OUTDOOR

SYMMETRISCH - SIMMETRICO

FIX - FISSO

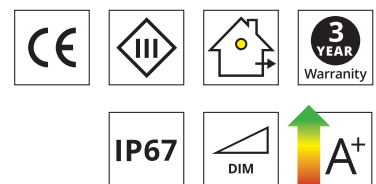

EIGENSCHAFTEN | CARATTERISTICHE

Art. Nr.	W	Volt	CREE COB	LM	K	CRI	Optik	Material	Befahrbar bis (kg) Carrabile fino a (kg)	Wabenraster Nido d'ape
B80-OG 27 6024	4,2 W	24 V DIM	✓	502 lm	2700 K	< 90	60°	Inox 316	1.000 kg / IK08	/
B80-OG 30 6024	4,2 W	24 V DIM	✓	502 lm	3000 K	< 90	60°	Inox 316	1.000 kg / IK08	/
B80-OG 40 6024	4,2 W	24 V DIM	✓	541 lm	4000 K	< 90	60°	Inox 316	1.000 kg / IK08	/
B80-OGB 27 6024	4,2 W	24 V DIM	✓	502 lm	2700 K	< 90	60°	Inox 316	1.000 kg / IK08	✓
B80-OGB 30 6024	4,2 W	24 V DIM	✓	502 lm	3000 K	< 90	60°	Inox 316	1.000 kg / IK08	✓
B80-OGB 40 6024	4,2 W	24 V DIM	✓	541 lm	4000 K	< 90	60°	Inox 316	1.000 kg / IK08	✓

LICHTVERTEILUNG | DISTRIBUZIONE DELLA LUCE

