

SPOT MEDIUM AUFBAU | SPORGENTE






SERIE B82-OSW

OUTDOOR

SPOT MEDIUM AUFBAU
SPOT MEDIUM SPORGENTE

ON/OFF | TRIAC DIMMING

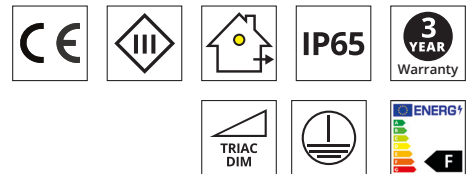

EIGENSCHAFTEN | CARATTERISTICHE

Art. Nr.	W	Volt	CREE COB	LM	K	CRI	Optik	Material	Anschlusskabel Cavo di connessione
B82-OSW 2750*	8,4 W	230 V	✓	750 lm	2700 K	< 90	36°	IK 06	/
B82-OSW 3050	8,4 W	230 V	✓	750 lm	3000 K	< 90	36°	IK 06	/
B82-OSW 4050	8,4 W	230 V	✓	750 lm	4000 K	< 90	36°	IK 06	/

LICHTVERTEILUNG | DISTRIBUZIONE DELLA LUCE

