


CL24 KONVERTER | CONVERTITORE CC/CV 12-48

■
■
■
■
 LED LIGHTING

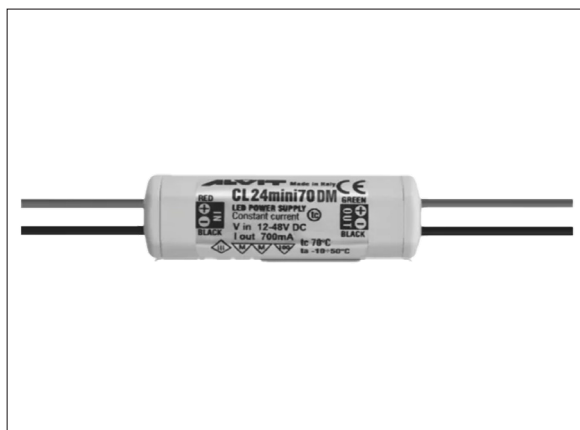

SERIE KONVERTER | B96-CL24

KONSTANTSTROMQUELLE 350 - 700 mA
CONVERTITORE CORRENTE 350 - 700 mA

EINGANGSSPANNUNG 12 - 24 - 48 V
TENSIONE INGRESSO 12 - 24 - 48 V

ON / OFF | PWM DIM



EIGENSCHAFTEN | CARATTERISTICHE

Art. Nr.	W	V in	Amp.	V out	Amp. out	IP	ta	Dimensions	VP
B96-CL24350	16 W	12 - 48 VAc	/	5 - 48 VDc	350 mA	IP 20	-25 ... +50°C	57 x 19 x 16 mm	100
B96-CL24500	24 W	12 - 48 VAc	/	5 - 48 VDc	500 mA	IP 20	-25 ... +50°C	57 x 19 x 16 mm	100
B96-CL24700	33 W	12 - 48 VAc	/	5 - 48 VDc	700 mA	IP 20	-25 ... +50°C	57 x 19 x 16 mm	100

