




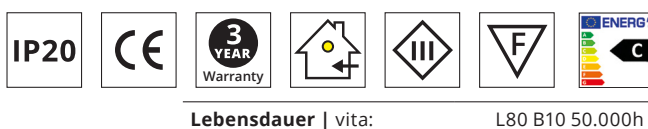

SERIE	BD6 DIM TO WARM
POWER	6 W
LUMEN	616 lm
CREE COB	350 mA - 17 V
CRI / RA	> 90
 68 MM AUSSCHNITT FORO 68 MM	



OHNE NETZTEIL | SENZA ALIMENTATORE



Art. Nr.	W	Lm	K	Driver
BD6-DW5035	6 W	616	1800-3000 K	/




TRIAC DIM NETZTEIL | ALIMENTATORE TRIAC DIM

Art. Nr.	W	V in	Amp.	V out	Amp. out	IP	ta	Dimensions	VP
B96-PE294B4233	12,8 W	200 - 240 VAc	/	25 - 37 Vdc	330 mA	IP 20	-20 ... +60°C	115 x 40 x 26 mm	/

andere Dali/KNX Driver | altri Dali/KNX driver:


> Siehe www.brilux.it/driver-dimmer | visita www.brilux.it/driver-dimmer

LICHTVERTEILUNG | DISTRIBUZIONE DELLA LUCE



DIMMER

Schalk	Universal Tastdimmer Regolatore a tasti universale	ETD U2
		ETD 2E
Eltako	Universal-Dimmschalter Dimmer universale elettronico	EUD61NPN-UC
		EUD12NPN-UC



ZUBEHÖR INNENRINGE | ACCESSORI ANELLI INTERNI



BD12-RIC75..
Ring konisch
Anello conico



BD12-RIF75..
Ring flat
Anello flat



BD12-RIR75..
Ring abgerundet
Anello curvato