

# KG7 MULTI DRIVER LED CC




## SERIE KGP | B95-KG7 MULTI

**Ausgang: CC (Konstant-Strom) 100 - 700 mA**

**Uscita: CC (corrente costante) 100 - 700 mA**


**LED Netzteil On / Off**

**LED Alimentatore On / Off**

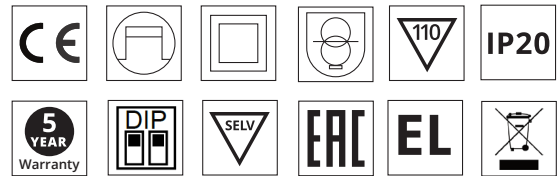

## EIGENSCHAFTEN | CARATTERISTICHE

| Art. Nr.     | W   | V in          | Amp. | V out        | Amp. out     | IP    | ta            | Dimensions      | VP  |
|--------------|-----|---------------|------|--------------|--------------|-------|---------------|-----------------|-----|
| B95-KG7M170C | 7 W | 220 - 240 VAc | /    | 2.5 - 20 Vdc | 100 - 700 mA | IP 20 | -10 ... +50°C | 65 x 29 x 18 mm | 325 |

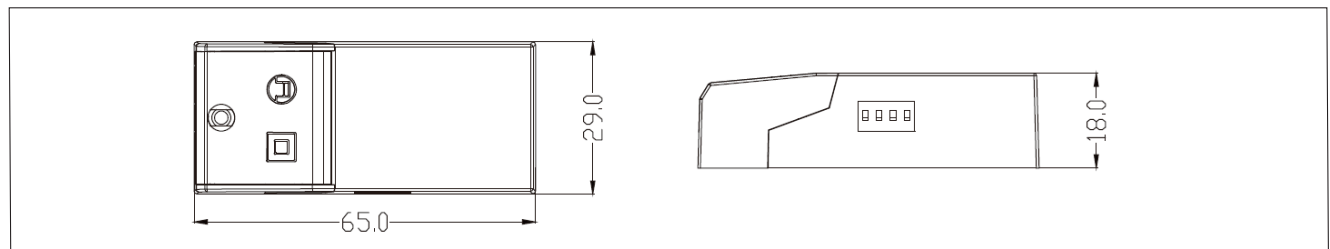

| Amp. out | Amp. in | W in | W out      | PF        | Eff. | V out   | V no load   |
|----------|---------|------|------------|-----------|------|---------|-------------|
| 100mA    | 0.046 A | 2.7W | 0.25-2.00W | 0.20-0.50 | 73%  | 2.5-20V | 35V<br>Max. |
| 150mA    | 0.048 A | 3.8W | 0.37-3.00W | 0.23-0.59 | 78%  |         |             |
| 200mA    | 0.050 A | 5.0W | 0.50-4.00W | 0.27-0.69 | 80%  |         |             |
| 250mA    | 0.051 A | 6.2W | 0.62-5.00W | 0.32-0.76 | 81%  |         |             |
| 300mA    | 0.053 A | 7.4W | 0.75-6.00W | 0.28-0.78 | 81%  |         |             |
| 350mA    | 0.055 A | 8.5W | 0.87-7.00W | 0.32-0.83 | 82%  |         |             |
| 400mA    | 0.055 A | 8.5W | 1.00-6.80W | 0.37-0.84 | 80%  | 2.5-17V |             |
| 450mA    | 0.055 A | 8.5W | 1.12-6.75W | 0.39-0.84 | 79%  | 2.5-15V |             |
| 500mA    | 0.055 A | 8.3W | 1.25-6.50W | 0.42-0.84 | 78%  | 2.5-13V |             |
| 550mA    | 0.055 A | 8.6W | 1.37-6.60W | 0.43-0.84 | 77%  | 2.5-12V |             |
| 600mA    | 0.055 A | 8.8W | 1.50-6.60W | 0.47-0.84 | 75%  | 2.5-11V |             |
| 650mA    | 0.055 A | 8.8W | 1.62-6.50W | 0.49-0.84 | 74%  | 2.5-10V |             |
| 700mA    | 0.055 A | 9.4W | 1.75-7.00W | 0.50-0.85 | 74%  |         |             |

